WINDSOR WINDOWS & DOORS

PINNACLE CLAD IMPACT **OUTSWING DOOR (HVHZ)**

INSTALLATION NOTES:

- ONE (1) INSTALLATION ANCHOR IS REQUIRED AT EACH ANCHOR LOCATION SHOWN UNLESS OTHERWISE NOTED.
- THE NUMBER OF INSTALLATION ANCHORS DEPICTED IS THE MINIMUM NUMBER OF ANCHORS TO BE USED FOR PRODUCT INSTALLATION OF THE MAXIMUM SIZE LISTED.
- 3. INSTALL INDIVIDUAL INSTALLATION ANCHORS WITHIN A TOLERANCE OF ±1/2 INCH (I.E., WITHOUT CONSIDERATION OF TOLERANCES). TOLERANCES ARE NOT CUMULATIVE FROM ONE INSTALLATION ANCHOR TO THE NEXT.
- 4. SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM(S). MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4 INCH. SHIM WHERE SPACE OF 1/16 INCH OR GREATER OCCURS. SHIM(S) SHALL BE CONSTRUCTED OF HIGH DENSITY PLASTIC OR BETTER.
- REFER TO SHEETS 4 7 FOR INSTALLATION DETAILS, ANCHOR SELECTION, AND ANCHOR REQUIREMENTS.
- SEALANT SHALL BE USED BETWEEN NAIL FIN AND SUBSTRATE.
- MINIMUM EMBEDMENT AND EDGE DISTANCE EXCLUDE WALL FINISHES. INCLUDING BUT NOT LIMITED TO STUCCO, FOAM, BRICK VENEER, AND SIDING.
- INSTALLATION ANCHORS AND ASSOCIATED HARDWARE MUST BE MADE OF CORROSION RESISTANT MATERIAL OR HAVE A CORROSION RESISTANT
- FOR HOLLOW BLOCK AND GROUT FILLED BLOCK, DO NOT INSTALL INSTALLATION ANCHORS INTO MORTAR JOINTS. EDGE DISTANCE IS MEASURED FROM FREE EDGE OF BLOCK OR EDGE OF MORTAR JOINT INTO FACE SHELL OF BLOCK.
- 10. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS, AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BY THE ANCHOR MANUFACTURER.
- 11. INSTALLATION ANCHOR CAPACITIES FOR PRODUCTS HEREIN ARE BASED ON SUBSTRATE MATERIALS WITH THE FOLLOWING PROPERTIES:
 - A. WOOD MINIMUM SPECIFIC GRAVITY OF 0.55.
 - B. CONCRETE MINIMUM COMPRESSIVE STRENGTH OF 3000 PSI.
 - C. GROUT FILLED CMU STRENGTH CONFORMANCE TO ASTM C90.
 - D. STEEL MINIMUM YIELD STRENGTH OF 33 KSI. MINIMUM 18 GA. WALL

GENERAL NOTES:

- 1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE CURRENT FLORIDA BUILDING CODE (FBC), INCLUDING HVHZ AND HAS BEEN **EVALUATED ACCORDING TO THE FOLLOWING:**
 - ASTM E 1886-13
 - ASTM E 1996-14
 - TAS 201-94
 - TAS 202-94
 - TAS 203-94
 - AAMA/WDMA/CSA 101/I.S.2/A440-17
- 2. ADEQUACY OF THE EXISTING STRUCTURAL CONCRETE/MASONRY AND 2X FRAMING AS A MAIN WIND FORCE RESISTING SYSTEM CAPABLE OF WITHSTANDING AND TRANSFERRING APPLIED PRODUCT LOADS TO THE FOUNDATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
- 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO THE STRUCTURE. BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
- THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN. A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT IN NON-HVHZ AREAS.
- APPROVED IMPACT PROTECTIVE SYSTEM IS NOT REQUIRED ON THIS PRODUCT IN AREAS REQUIRING IMPACT RESISTANCE.
- 6. DOOR FRAME MATERIAL:
- 6.1. WOOD
- ALUMINUM 6063-T5
- 7. DISSIMILAR METALS INCLUDING FASTENERS THAT MAY COME INTO CONTACT WITH ALUMINUM COMPONENTS SHALL BE PROTECTED IN ACCORDANCE WITH THE FBC.
- 8. DESIGNATIONS "X" AND "O" STAND FOR THE FOLLOWING:
- X: OPERABLE PANEL
- O: STATIONARY PANEL

TABLE OF CONTENTS				
SHEET	REVISION	SHEET DESCRIPTION		
1	=	INSTALLATION & GENERAL NOTES		
2	-	ELEVATIONS & ANCHOR LAYOUTS		
3	-	VERTICAL SECTIONS		
4	-	VERTICAL SECTIONS		
5	ı	HORIZONTAL SECTIONS		
6	-	ANCHOR SCHEDULE		
7	-	GLAZING DETAILS AND HARDWARE NOTES		

	DESIGN PRESSURE TABLE						
TYP. OVERALL SIZE		DESIGN		INSTALLATION	MISSILE		
WIDTH	HEIGTH	PRESSURE	CONFIGURATION	METHOD	IMPACT RATING		
75.06"	98.5"	+50/-65 PSF	BI-HINGE XX	THROUGH	INAL 9 CNAL		
75.06"	98.5"	+50/-65 PSF	STA - ACT OX	FRAME, NAIL FIN & CLIP	LMI & SMI		



WINDSOR WINDOWS & DOORS

900 S. 19TH STREET. WEST DES MOINES, IA 50265 PH: (515)223-6660 FAX: (515)224-1938

REMARKS

BY:
BUILDING DROPS, If
398 E. DANIA BEACH BLVD., STE.?
DANIA BEACH, FL. 33004
PH. (954)734.4738
FAX: (954)744.4738

BY DATE

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENER AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIE SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIAT FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSEI ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT



FL11517

DATE: 07.03.19 CHK. BY:

DWG. BY: RV


NTS SCALE:


DWG. #: WWD038


SHEET:


OF 7

HFN

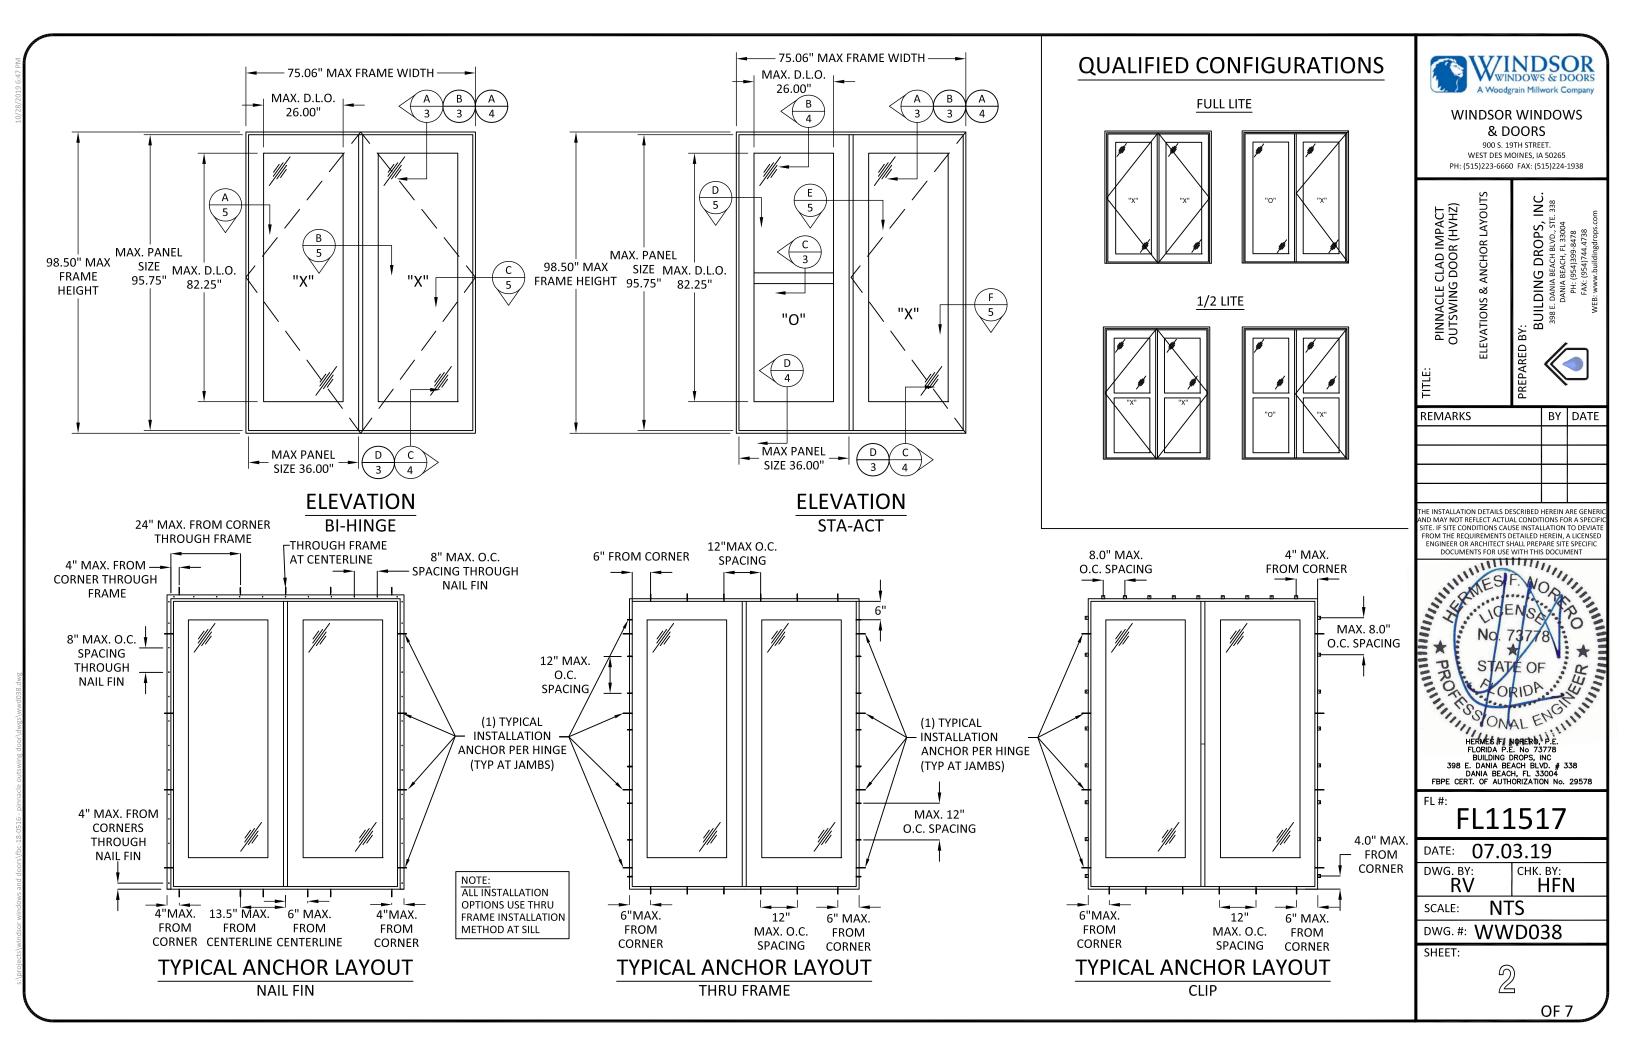

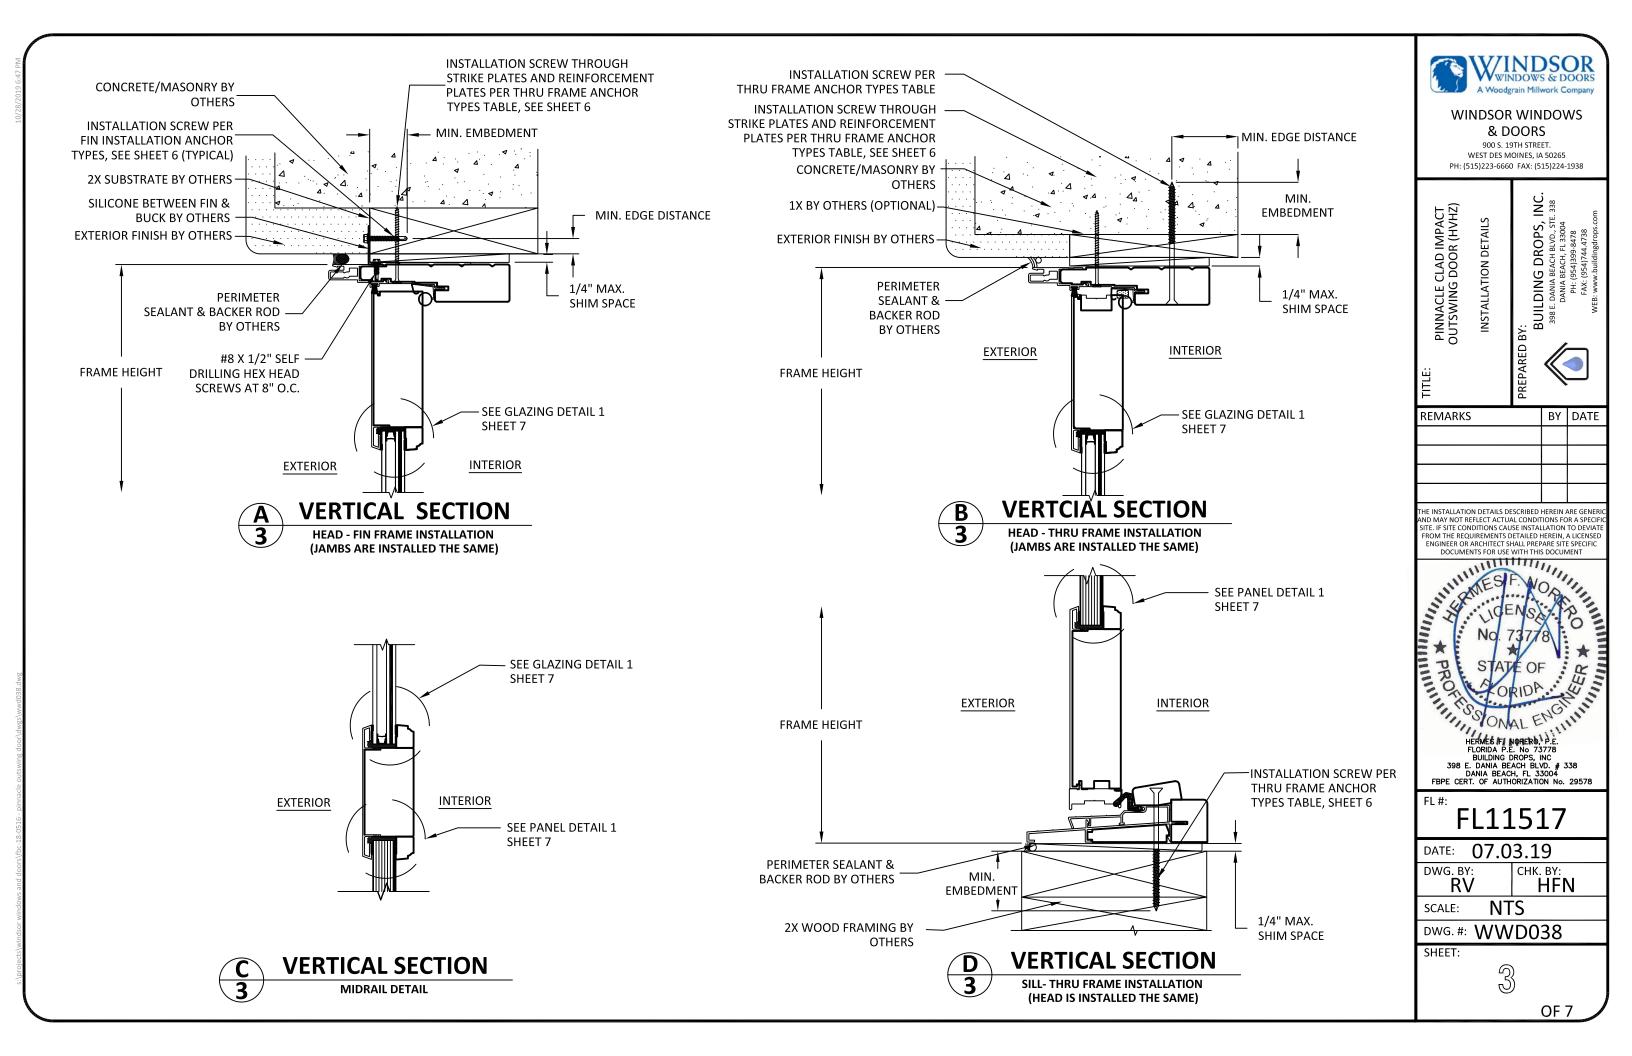

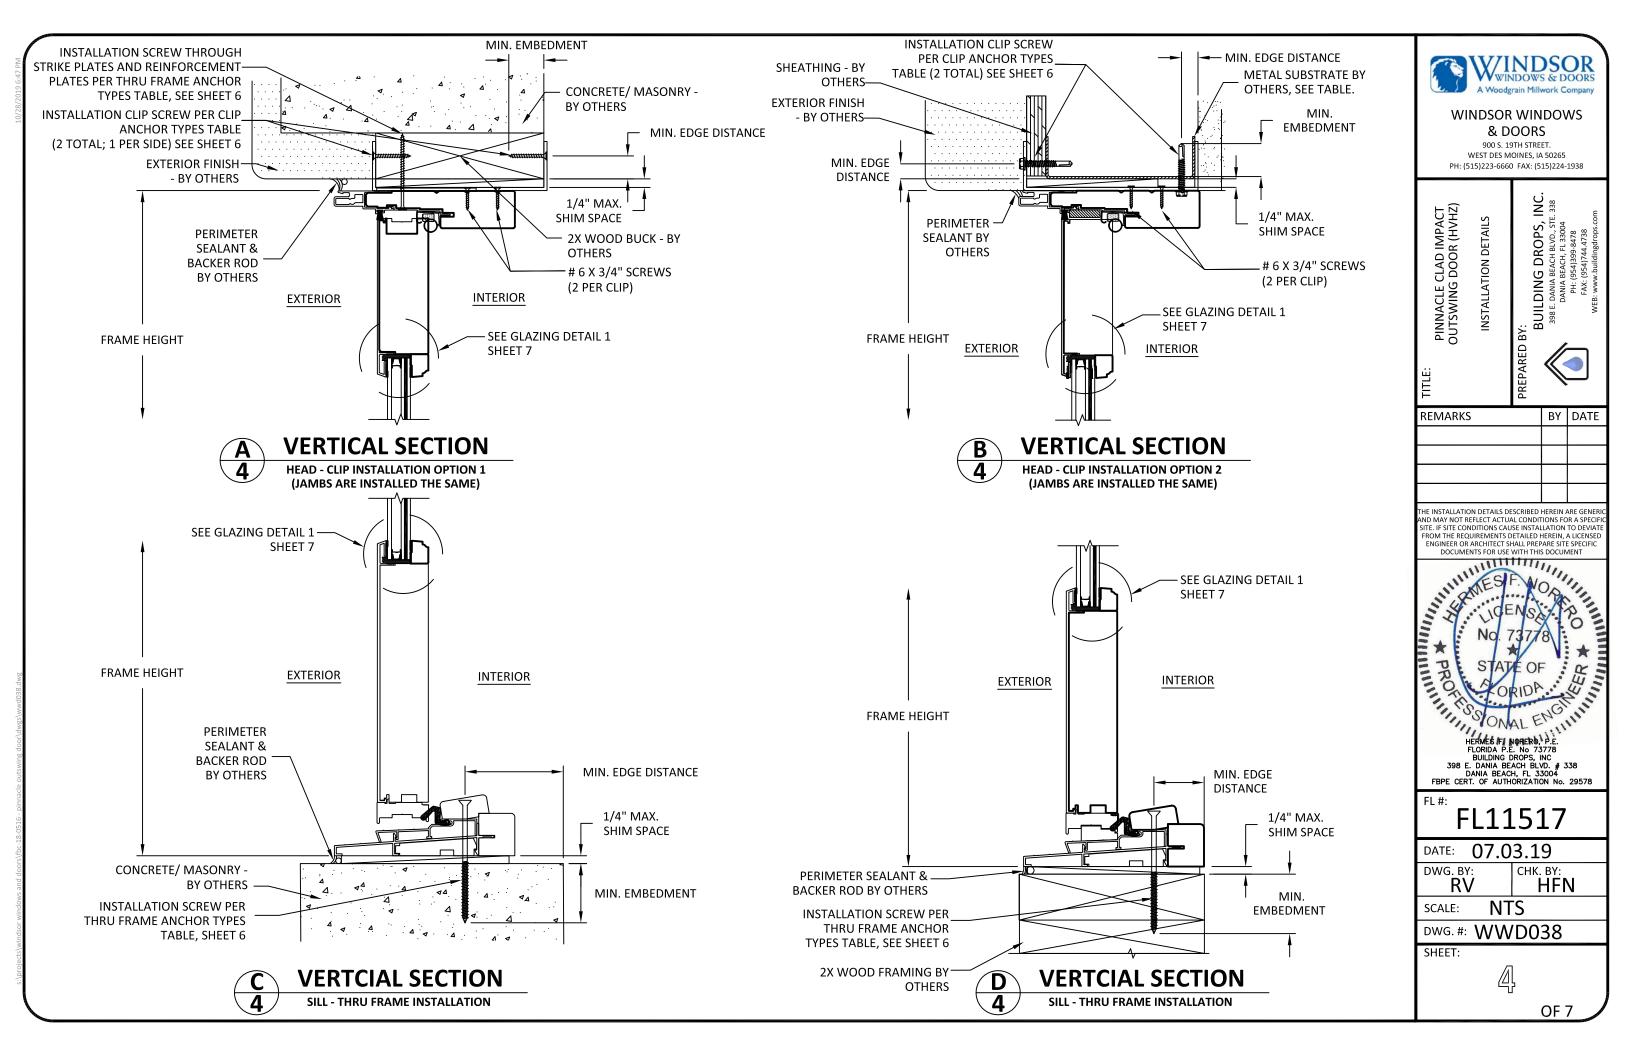

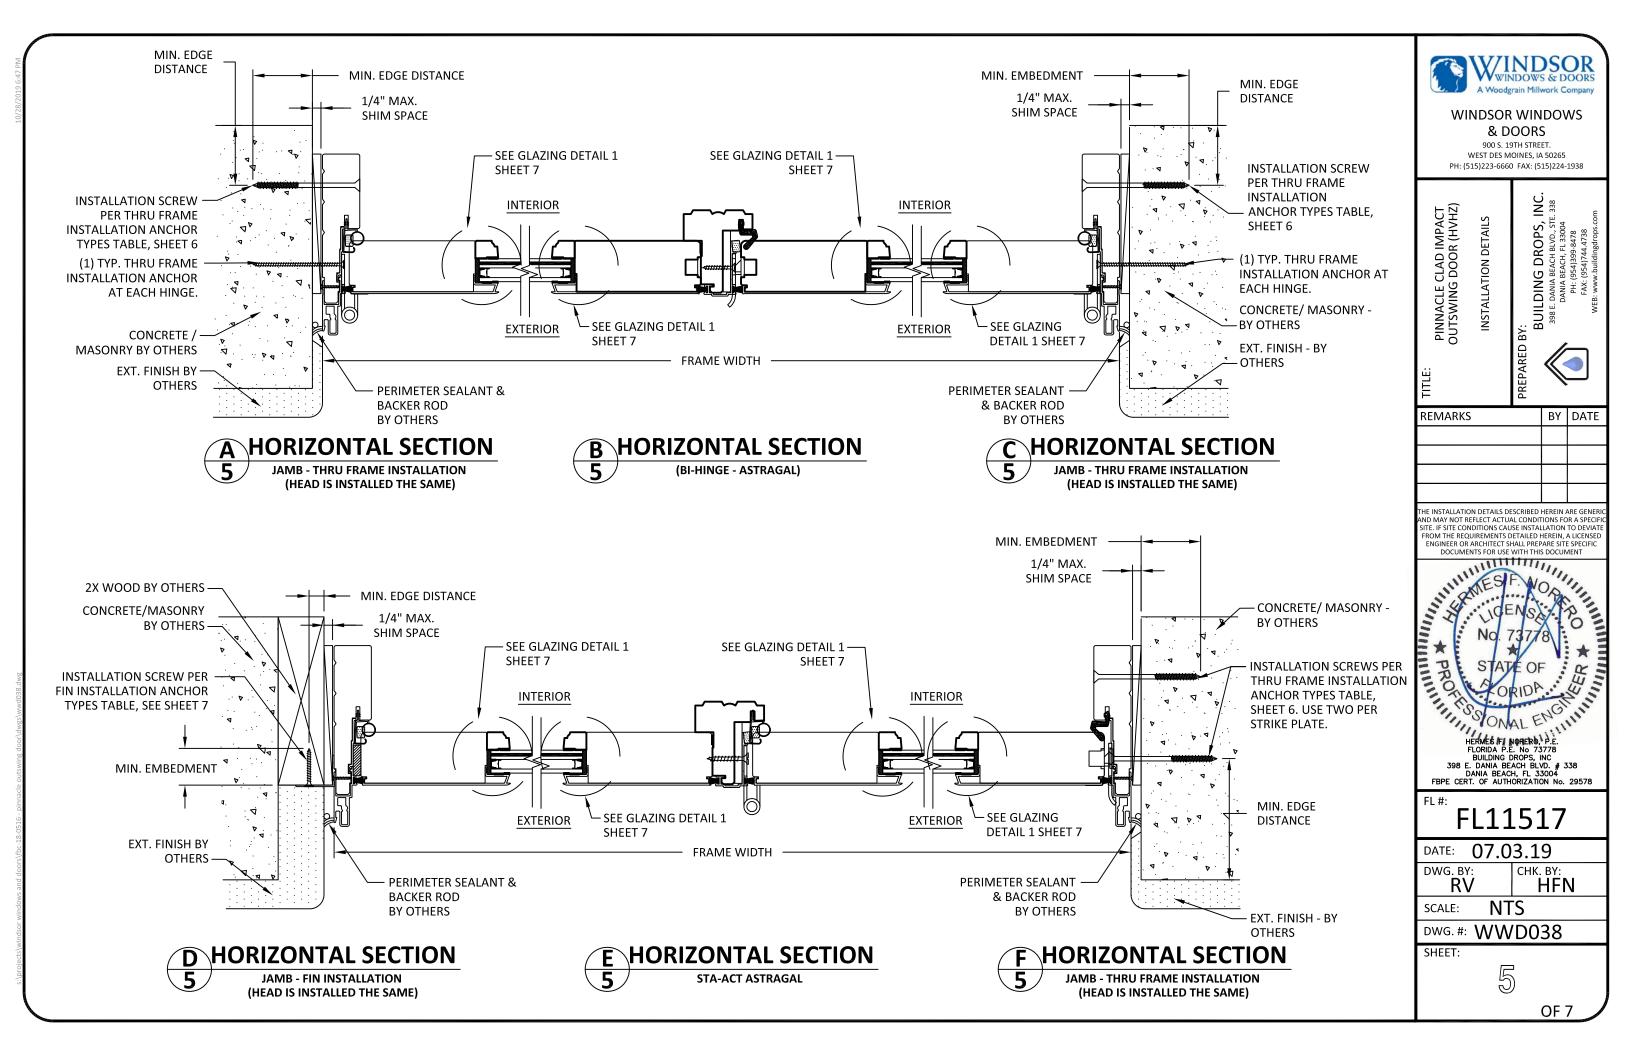

	CL	IP ANCHOR TYPES			
ANCHOR DESCRIPTION	SUBSTRATE REQUIREMENTS	MIN. EMBEDMENT	MIN. EDGE DISTANCE	MAX. SPACING DISTANCE	NOTES
3/16" Ø ULTRACON BY ELCO (F _u =155 <i>KSI</i> , F _y =177 <i>KSI</i>)	CONCRETE AT HEAD, SILL OR JAMBS F' _C =3000 <i>PSI</i> MIN. C-90 HOLLOW/FILLED BLOCK AT JAMBS F' _M =2000 <i>PSI</i> MIN.	1.75"	1.0"	HEAD: 8" O.C. AND 4" FROM CORNER JAMBS: 8" O.C. AND 4" FROM CORNER SILL: PER THRU FRAME INSTALLATION	MAY BE USED THROUGH OPTIONAL 1X BUCKS, BY OTHERS
#8-24 WOOD SCREWS	MIN. S.G.= 0.55 WOOD	1.0"	1.0"	HEAD: 8" O.C. AND 4" FROM CORNER JAMBS: 8" O.C. AND 4" FROM CORNER SILL: PER THRU FRAME INSTALLATION	
#8-24 SELF-DRILLING OR SELF-TAPPING HWH SCREWS (GRADE 5)	STEEL: 18 GA. MIN., F _y =33 <i>KSI</i> MIN. ALUM.: 1/8" MIN., 6063-T5 MIN.	3 THREADS PENETRATION PAST METAL STRUCTURE	0.75"	HEAD: 8" O.C. AND 4" FROM CORNER JAMBS: 8" O.C. AND 4" FROM CORNER SILL: PER THRU FRAME INSTALLATION	STEEL IN CONTACT WITH ALUM. TO BE PLATED OR PAINTED

CLIP FASTENED TO DOOR WOOD FRAME WITH (2) #6 X 3/4" SCREWS PER CLIP

THRU FRAME ANCHOR TYPES					
ANCHOR DESCRIPTION	SUBSTRATE REQUIREMENTS	MIN. EMBEDMENT	MIN. EDGE	MAX. SPACING	NOTES
	5555TWATE REQUIREMENTS		DISTANCE	DISTANCE	110125
			1.0"	HEAD: 12" O.C. AND 6	
3/16" Ø ULTRACON BY	CONCRETE AT HEAD, SILL OR			FROM CORNER	MAY BE USED
ELCO (F _u =155 <i>KSI</i> , F _y =177 <i>KSI</i>)	JAMBS F' _C =3000 <i>PSI</i> MIN.	1.75"		JAMBS: 12" O.C. AND 6	THROUGH
	C-90 HOLLOW/FILLED BLOCK AT	1.75		FROM CORNER	OPTIONAL 1X
	JAMBS F' _M =2000 <i>PSI</i> MIN.			SILL: 12" O.C. AND 6	BUCKS, BY OTHERS
				FROM CORNER	
	MIN. S.G.= 0.55 WOOD	1.0"	0.75"	HEAD: 12" O.C. AND 6	
				FROM CORNER	
#10-24 WOOD SCREWS				JAMBS: 12" O.C. AND 6	
#10-24 WOOD SCREWS				FROM CORNER	
				SILL: 12" O.C. AND 6	
				FROM CORNER	
#10-24 SELF-DRILLING OR SELF-TAPPING HWH SCREWS (GRADE 5)	STEEL: 18 GA. MIN., F _y =33 <i>KSI</i> MIN. ALUM.: 1/8" MIN., 6063-T5 MIN.	3 THREADS PENETRATION	0.75"	HEAD: 12" O.C. AND 6	
				FROM CORNER	STEEL IN CONTACT
				JAMBS: 12" O.C. AND 6	WITH ALUM. TO B
		PAST METAL		FROM CORNER	PLATED OR
		STRUCTURE		SILL: 12" O.C. AND 6	PAINTED
				FROM CORNER	

	FIN INS	TALLATION ANCHOR TY	/PES		
ANCHOR DESCRIPTION	SUBSTRATE REQUIREMENTS	MIN. EMBEDMENT	MIN. EDGE DISTANCE	MAX. SPACING DISTANCE	NOTES
#8 WOOD SCREWS	MIN. S.G.= 0.55 WOOD	1.5"	0.5"	HEAD: 8" O.C. AND 4" FROM CORNER JAMBS: 8" O.C. AND 4" FROM CORNER SILL: PER THRU FRAME INSTALLATION	
#8-24 SELF-DRILLING OR SELF-TAPPING HWH SCREWS (GRADE 5)	STEEL: 18 GA. MIN., F _y =33 <i>KSI</i> MIN. ALUM.: 1/8" MIN., 6063-T5 MIN.	3 THREADS PENETRATION PAST METAL STRUCTURE	0.5"	HEAD: 8" O.C. AND 4" FROM CORNER JAMBS: 8" O.C. AND 4" FROM CORNER SILL: PER THRU FRAME INSTALLATION	STEEL IN CONTACT WITH ALUM. TO BE PLATED OR PAINTED

SEE ELEVATIONS FOR ADDITIONAL THROUGH FRAME SCREW REQUIREMENTS AT HEAD AND SILL

ANCHOR NOTES:

PINNACLE CLAD OS BI-HINGE DOOR

- -USE ONE THRU FRAME INSTALLATION ANCHOR PER HINGE
- -USE FOUR THRU FRAME INSTALLATION ANCHORS THRU HEAD STRIKE PLATE AND REINFORCEMENT FOR CLIP AND THROUGH FRAME INSTALLATION (NOT REQUIRED FOR NAIL FIN)
- -INSTALL ANCHORS THROUGH HARDWARE LOCATIONS WITH SPECIFIED EMBEDMENT AND EDGE DISTANCE INTO WALL

PINNACLE CLAD OS ACTIVE-STATIONARY DOOR

- -USE TWO THRU FRAME INSTALLATION ANCHORS THRU HEAD STRIKE PLATE FOR CLIP AND THROUGH FRAME INSTALLATION (NOT REQUIRED FOR NAIL FIN)
- -USE TWO THRU FRAME INSTALLATION ANCHORS THRU JAMB STRIKE PLATES
- -INSTALL ANCHORS THROUGH HARDWARE LOCATIONS WITH SPECIFIED EMBEDMENT AND EDGE DISTANCE INTO WALL



WINDSOR WINDOWS & DOORS

900 S. 19TH STREET. WEST DES MOINES, IA 50265 PH: (515)223-6660 FAX: (515)224-1938


PINNACLE CLAD IMPACT OUTSWING DOOR (HVHZ) ANCHOR SCHEDULE

PREPARED BY:

BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954)399-8478
FAX: (954)744.4738

REMARKS BY DATE

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT

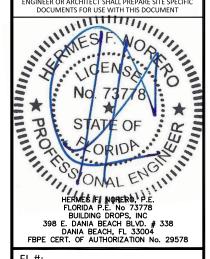

FL11517

DATE: 07.03.19

DWG. BY: CHK. BY: RV

SCALE:

DWG. #: WWD038


SHEET:



NTS

OF 7

HFN

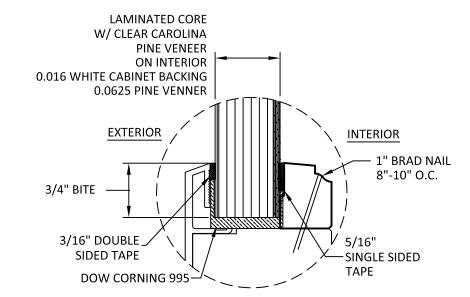

GLAZING DETAIL 1

PANEL DETAIL 1

GLASS NOTES:

 GLASS THICKNESS AND TYPE COMPLIES WITH ASTM E 1300 REQUIREMENT GLASS CHARTS AND FLORIDA BUILDING CODE CHAPTER 24 SAFETY GLAZING REQUIREMENTS


HARDWARE NOTES:

PINNACLE CLAD OS BI-HINGE DOOR

(4) ADJUSTABLE HINGES INTO ASTRAGAL AT 7", 32-½", 57½" & 83-½" FROM THE THRESHOLD. ACTIVE PANEL FIVE-POINT LOCKING SYSTEM WITH ENGAGEMENT POINTS AT 7", 38" & 74" ABOVE THE THRESHOLD WITH SHOOT BOLTS AT HEAD AND SILL. DEADBOLT LOCATED 34" ABOVE THE THRESHOLD. SPACING BETWEEN LOCK POINTS AND HINGES NOT TO BE EXCEEDED FOR ALTERNATE SIZES. SECONDARY ACTIVE PANEL WITH LEVER ACTIVATED SHOOT BOLTS AT HEAD AND SILL.

PINNACLE CLAD OS ACTIVE-STATIONARY DOOR

(4) ADJUSTABLE HINGES INTO ASTRAGAL AT 7", 32-½", 57½" & 83-½" FROM THE THRESHOLD. ACTIVE PANEL MULTI-POINT LOCKING SYSTEM WITH ENGAGEMENT POINTS AT 7", 38" & 74" ABOVE THE THRESHOLD WITH SHOOT BOLTS AT HEAD AND SILL. DEAD BOLT LOCATED 34" ABOVE THE THRESHOLD. SPACING BETWEEN LOCK POINTS AND HINGES NOT TO BE EXCEEDED FOR ALTERNATE SIZES.

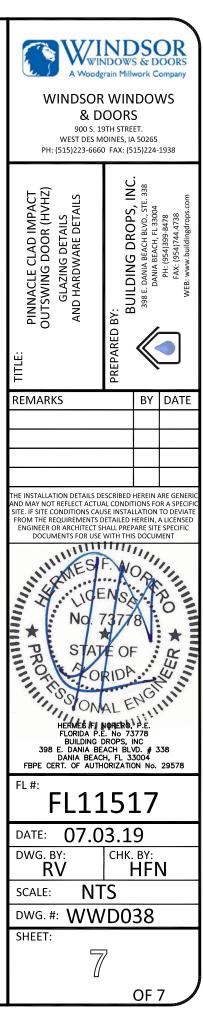

(fbc-18-0516 - pinnacle outswing door\dwgs\wwd038.dwg