


SECTION DETAILS: STANDARD FRAME SCALE: 3" = 1'-0"

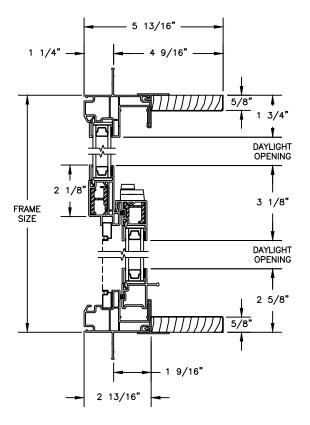

**HEAD JAMB & SILL** 

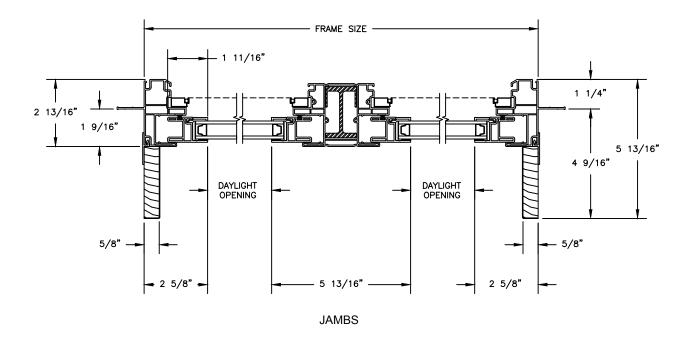


SECTION DETAILS: BRICKMOULD FRAME SCALE: 3" = 1'-0"

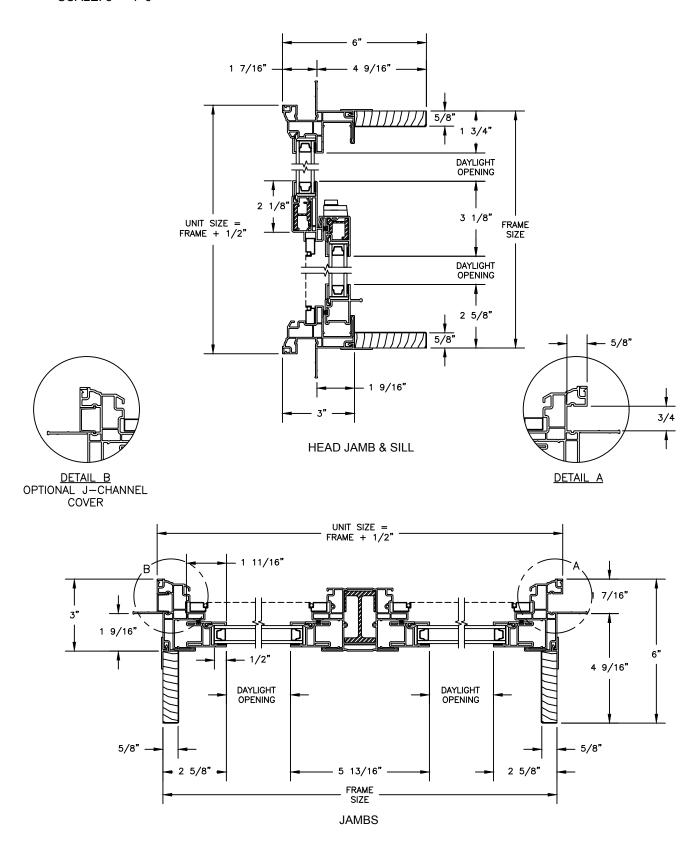


SECTION DETAILS: MULLIONS


SCALE: 3" = 1'-0"




HORIZONTAL T-BAR FIXED/OPERATOR




HORIZONTAL MULLION WITH 1/2" SPREAD MULL REINFORCEMENT RADIUS/OPERATOR




VERTICAL T-BAR OPERATOR/OPERATOR



VERTICAL MULLION WITH 1/2" SPREAD MULL REINFORCEMENT OPERATOR/OPERATOR




HORIZONTAL MULLION BRICKMOULD FRAME RADIUS/OPERATOR




VERTICAL MULLION BRICKMOULD FRAME WITH ZERO MULL OPERATOR/OPERATOR


SECTION DETAILS : STANDARD FRAME CONSTRUCTION SCALE: 2" = 1'-0"

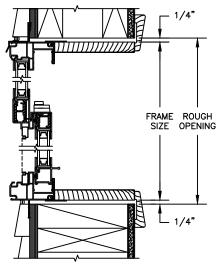


HEAD JAMB & SILL 2 X 6 FRAME WITH SIDING

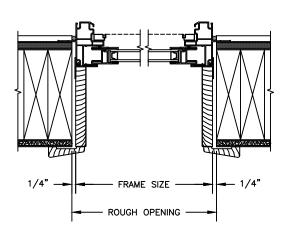

JAMBS 2 X 6 FRAME WITH SIDING

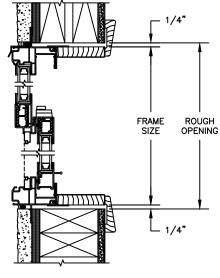


HEAD JAMB & SILL 2 X 4 FRAME WITH STUCCO

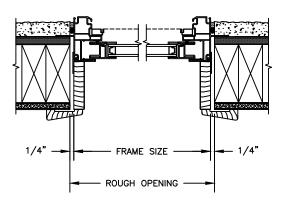


JAMBS 2 X 4 FRAME WITH STUCCO

### NOTE:


SECTION DETAILS : STANDARD FRAME CONSTRUCTION SCALE: 2" = 1'-0"

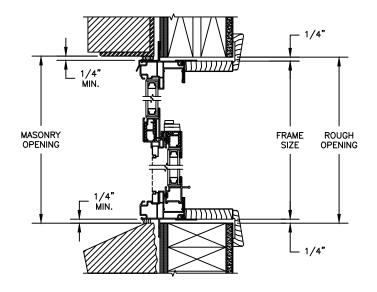

HEAD JAMB & SILL 2 X 4 FRAME WITH BRICK VENEER

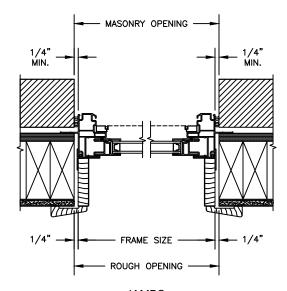


JAMBS
2 X 4 FRAME WITH BRICK VENEER

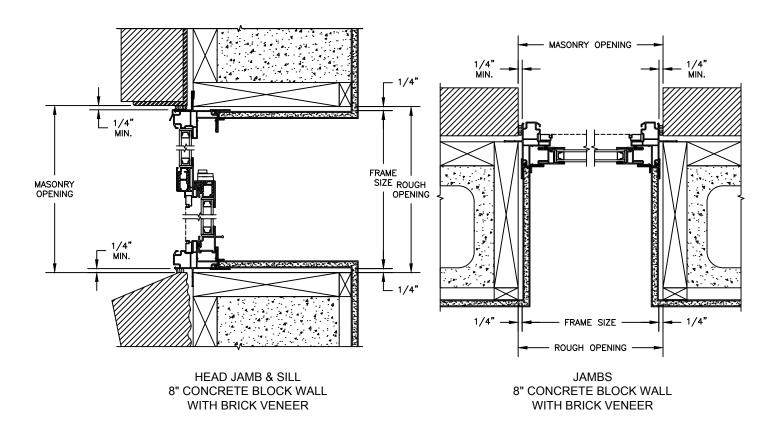


NOTE:

SECTION DETAILS: BRICKMOULD FRAME CONSTRUCTION


SCALE: 2" = 1'-0"

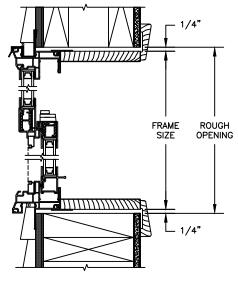


HEAD JAMB & SILL 2 X 6 FRAME WITH SIDING

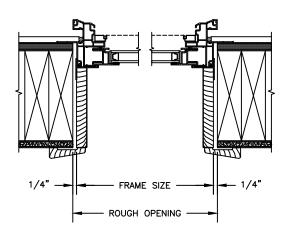

JAMBS 2 X 6 FRAME WITH SIDING

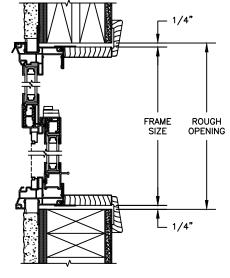


HEAD JAMB & SILL 2 X 4 FRAME WITH STUCCO

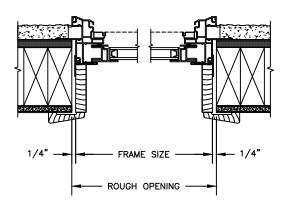


JAMBS 2 X 4 FRAME WITH STUCCO

### NOTE:


SECTION DETAILS : BRICKMOULD FRAME CONSTRUCTION SCALE: 2" = 1'-0"

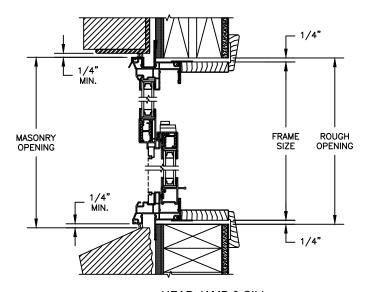

HEAD JAMB & SILL 2 X 4 FRAME WITH BRICK VENEER

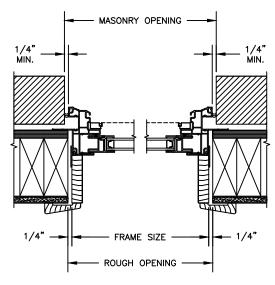


JAMBS
2 X 4 FRAME WITH BRICK VENEER

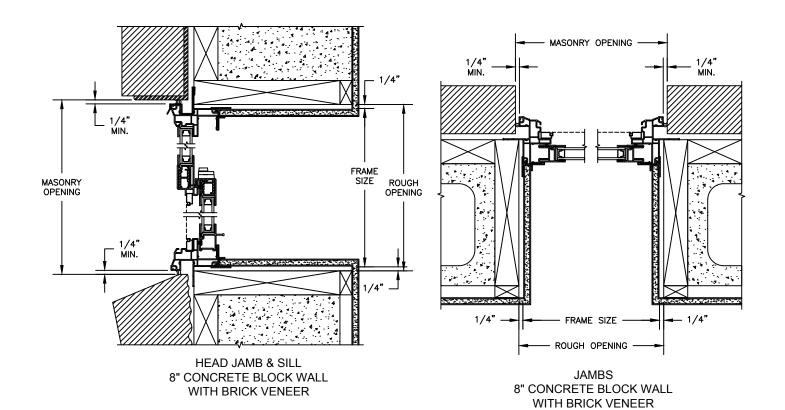

NOTE:

SECTION DETAILS: ANGLE BAY VERTICAL SECTION SCALE: 3" = 1'-0"

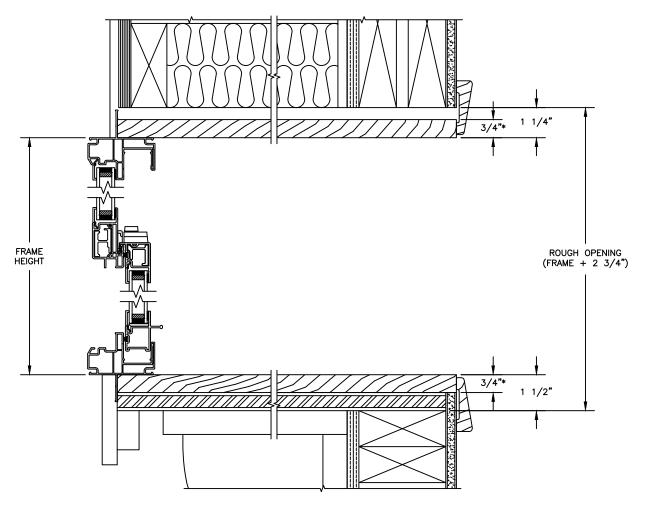

\* 1" FOR PAINT GRADE OPTION (ADD 1/2" TO ROUGH OPENING)


NOTES:
STANDARD SET-UP UNIT HAS HARDWARE, WEATHERSTRIP, DRIP CAP, SCREENS AND HEAD AND SEAT BOARDS APPLIED.
STANDARD JAMB WITH EXTENDER IS 4 9/16". HEAD AND SEAT BOARDS ARE SELECT PINE, EDGE-GLUED, FINGER-JOINTED AND SANDED. 1" FINISHED THICKNESS, OPTIONAL 3/4" VENEERED HEAD AND SEAT BOARDS ARE AVAILABLE

ROUGH AND MASONRY OPENING HEIGHTS INCLUDE HEAD AND SEAT BOARDS. IF HEAD SEAT BOARDS ARE NOT SPECIFIED, SUBTRACT 3/4" FOR EACH BOARD. CONSTRUCTION MATERIALS SUPPLIED BY OTHERS.

PROJECTION IS DEFINED AS THE DIMENSION FROM THE BACK OF THE NAILING FLANGE TO THE EXTERIOR OF THE WALL SHEATHING.

HEIGHT MEASUREMENTS	
BAY	
HEIGHT	R.O. HEIGHT
48	50 1/4
54	56 1/4
60	62 1/4

BAY UNITS MUST BE CONFIGURED FROM STANDARD SIZE UNITS. AN ALMOST INFINITE NUMBER OF COMBINATIONS ARE POSSIBLE FROM A WIDE RANGE OF STANDARD UNITS AVAILABLE. ADD TOGETHER CASEMENT WINDOWS OF THE SAME HEIGHT TO CREATE ANY GROUPING DESIRED.

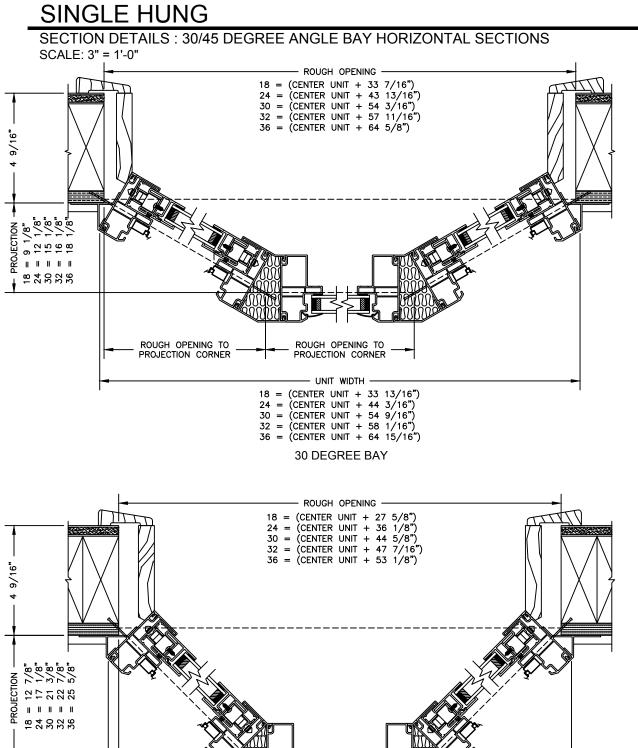

ROUGH OPENING TO PROJECTION CORNER

24 = (CENTER UNIT + 37") 30 = (CENTER UNIT + 45 1/2") 32 = (CENTER UNIT + 48 5/16")

36 = (CENTER UNIT + 54")

ROUGH OPENING TO PROJECTION CORNER