

Pinnacle Series

GLIDE-BY

ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opg. Clad Rough Opg. Frame Glass	3-3 15/16	3-11 15/16	4-7 15/16	4-11 15/16	5-3 15/16	5-11 15/16
1-11 1/4	1616	2016	2416	2616	2816	3216
2-3 1/4	1620	2020	2420	2620	2820	3220
2-11 1/4	1628	2028	2428	2628	2828	3228
3-3 1/4	1632	2032	2432	2632	2832	3232
3-7 1/4	1636	2036	2436	2636	2836	3236
3-11 1/4	1640	2040	2440	2640	2840	3240
4-7 1/4	1648	2048	2448	2648	2848	3248
5-1 1/4	1654	2054	2454	2654	2854	3254

CLAD UNIT SIZE INFORMATION

FOR CLAD WM 180 BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD WM 180 SOLID BACK BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 3/4" TO FRAME HEIGHT*

FOR CLAD 3 1/2 FLAT

- ADD 5 7/8" TO FRAME WIDTH
- ADD 3 5/16" TO FRAME HEIGHT*

FOR CLAD WILLIAMSBURG


- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 5/8" TO FRAME HEIGHT*

* ADD ADDITIONAL 7/8" FOR 1 1/4" CLAD SUBSILL
ADD ADDITIONAL 1 7/8" FOR 2 1/4" CLAD SUBSILL

OTHER GRILLE PATTERNS



HANDING



NOTES:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
SHADED SIZES MEET MOST EGRESS REQUIREMENTS. VERIFY LOCAL CODES.

Pinnacle Series



GLIDE-BY - TRIPLES

ELEVATIONS
SCALE: 1/8" = 1'-0"


Mas. Opg. Clad
Rough Opg.
Frame
Glass

	6-1 7/16 6-1 7/16 6-0 11/16 16-32-16	7-5 7/16 7-5 7/16 7-4 11/16 20-40-20	7-9 7/16 7-9 7/16 7-8 11/16 28-28-28	8-9 7/16 8-9 7/16 8-8 11/16 24-48-24
1-11 1/4 2-11 1/4 2-10 3/4 28				
16-32-1628	20-40-2028	28-28-2828	24-48-2428	
3-11 1/4 3-11 1/4 3-10 3/4 40				
16-32-1640	20-40-2040	28-28-2840	24-48-2440	
4-7 1/4 4-7 1/4 4-6 3/4 48				
16-32-1648	20-40-2048	28-28-2848	24-48-2448	
5-1 1/4 5-1 1/4 5-0 3/4 54				
16-32-1654	20-40-2054	28-28-2854	24-48-2454	

OTHER GRILLE PATTERNS

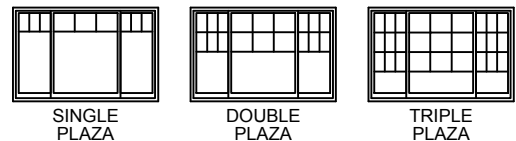

HANDING



CLAD UNIT SIZE INFORMATION

- FOR CLAD WM 180 BRICKMOLD**
 - ADD 2 13/16" TO FRAME WIDTH
 - ADD 1 3/4" TO FRAME HEIGHT*
 - FOR CLAD WM 180 SOLID BACK BRICKMOLD**
 - ADD 2 13/16" TO FRAME WIDTH
 - ADD 1 3/4" TO FRAME HEIGHT*
 - FOR CLAD 3 1/2 FLAT**
 - ADD 5 7/8" TO FRAME WIDTH
 - ADD 3 5/16" TO FRAME HEIGHT*
 - FOR CLAD WILLIAMSBURG**
 - ADD 6 1/2" TO FRAME WIDTH
 - ADD 3 5/8" TO FRAME HEIGHT*
- * ADD ADDITIONAL 7/8" FOR 1 1/4" CLAD SUBSILL
ADD ADDITIONAL 1 7/8" FOR 2 1/4" CLAD SUBSILL

NOTES:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOLD.
SHADED SIZES MEET MOST EGRESS REQUIREMENTS. VERIFY LOCAL CODES.