
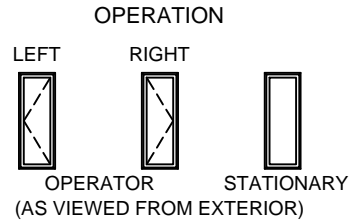


# Legend Series

## CASEMENT - 14" WIDE

ELEVATIONS : OPERATING / PICTURE / STATIONARY  
 SCALE: 1/8" = 1'-0"

Masonry Opening Rough Opg. Frame Glass	1-9 9/16 1-6 3/4 1-6 14	3-3 9/16 3-0 3/4 3-0 14	4-9 9/16 4-6 3/4 4-6 14	6-3 9/16 6-0 3/4 6-0 14
2-2 15/16 2-1 1/4 2-0 20				
2-8 15/16 2-7 1/4 2-6 26				
3-2 15/16 3-1 1/4 3-0 32				
3-8 15/16 3-7 1/4 3-6 38				
4-2 15/16 4-1 1/4 4-0 44				
4-8 15/16 4-7 1/4 4-6 50				
5-2 15/16 5-1 1/4 5-0 56				
5-8 15/16 5-7 1/4 5-6 62				
6-2 15/16 6-1 1/4 6-0 68				
6-8 15/16 6-7 1/4 6-6 74				



### UNIT SIZE INFORMATION

**180 BRICKMOULD**

- ADD 2 13/16" TO FRAME WIDTH
- ADD 2 7/16" TO FRAME HEIGHT

**3 1/2" FLAT CASING**

- ADD 5 13/16" TO FRAME WIDTH
- ADD 3 15/16" TO FRAME HEIGHT

**4 1/2" BACKBAND**

- ADD 7 13/16" TO FRAME WIDTH
- ADD 4 15/16" TO FRAME HEIGHT

**5 1/2" FLAT CASING**

- ADD 9 13/16" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT

**WILLIAMSBURG**

- ADD 5 3/8" TO FRAME WIDTH
- ADD 3 11/16" TO FRAME HEIGHT

**PLANTATION**

- ADD 5 13/16" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT

\* ADD ADDITIONAL 1" FOR BULLNOSE SUBSILL

**NOTE:**

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT  
 TO CALCULATE MASONRY OPENING

NOTES:  
 MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD.

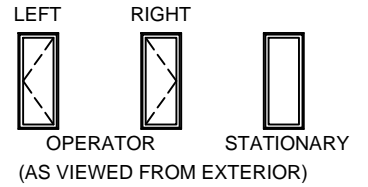
# Legend Series

## CASEMENT - 16" WIDE


ELEVATIONS : OPERATING / PICTURE / STATIONARY  
 SCALE: 1/8" = 1'-0"

Masonry Opening	1-11 9/16	3-7 9/16	5-3 9/16	6-11 9/16
Rough Oppg.	1-8 3/4	3-4 3/4	5-0 3/4	6-8 3/4
Frame	1-8	3-4	5-0	6-8
Glass	16	16	16	16
2-2 15/16				
2-8 15/16				
3-2 15/16				
3-8 15/16				
4-2 15/16				
4-8 15/16				
5-2 15/16				
5-8 15/16				
6-2 15/16				
6-8 15/16				

### OPERATION



### OTHER GRILLE PATTERNS

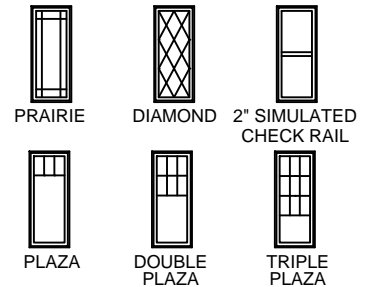

### UNIT SIZE INFORMATION

- 180 BRICKMOULD**
  - ADD 2 13/16" TO FRAME WIDTH
  - ADD 2 7/16" TO FRAME HEIGHT
- 3 1/2" FLAT CASING**
  - ADD 5 13/16" TO FRAME WIDTH
  - ADD 3 15/16" TO FRAME HEIGHT
- 4 1/2" BACKBAND**
  - ADD 7 13/16" TO FRAME WIDTH
  - ADD 4 15/16" TO FRAME HEIGHT
- 5 1/2" FLAT CASING**
  - ADD 9 13/16" TO FRAME WIDTH
  - ADD 5 15/16" TO FRAME HEIGHT
- WILLIAMSBURG**
  - ADD 5 3/8" TO FRAME WIDTH
  - ADD 3 11/16" TO FRAME HEIGHT
- PLANTATION**
  - ADD 5 13/16" TO FRAME WIDTH
  - ADD 5 15/16" TO FRAME HEIGHT

\* ADD ADDITIONAL 1" FOR BULLNOSE SUBSILL

NOTE:  
 ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT  
 TO CALCULATE MASONRY OPENING

NOTES:  
 MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD.

# Legend Series

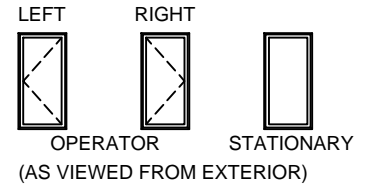
## CASEMENT - 20" WIDE

ELEVATIONS : OPERATING / PICTURE / STATIONARY


SCALE: 1/8" = 1'-0"

Masonry Opening Rough Opng. Frame Glass	2-3 9/16	4-3 9/16	6-3 9/16	8-3 9/16
	2-0 3/4	4-0 3/4	6-0 3/4	8-0 3/4
	2-0	4-0	6-0	8-0
	20	20	20	20
2-2 15/16 2-1 1/4 2-0				
2-2020	2020	2020-2	2020-3	2020-4
2-8 15/16 2-7 1/4 2-6				
2-2026	2026	2026-2	2026-3	2026-4
3-2 15/16 3-1 1/4 3-0				
3-2032	2032	2032-2	2032-3	2032-4
3-8 15/16 3-7 1/4 3-6				
3-2038	2038	2038-2	2038-3	2038-4
4-2 15/16 4-1 1/4 4-0				
4-2044	2044	2044-2	2044-3	2044-4
4-8 15/16 4-7 1/4 4-6				
4-2050	2050	2050-2	2050-3	2050-4
5-2 15/16 5-1 1/4 5-0				
5-2056	2056	2056-2	2056-3	2056-4
5-8 15/16 5-7 1/4 5-6				
5-2062	2062	2062-2	2062-3	2062-4
6-2 15/16 6-1 1/4 6-0				
6-2068	2068	2068-2	2068-3	2068-4
6-8 15/16 6-7 1/4 6-6				
6-2074	2074	2074-2	2074-3	2074-4

### OPERATION



### OTHER GRILLE PATTERNS

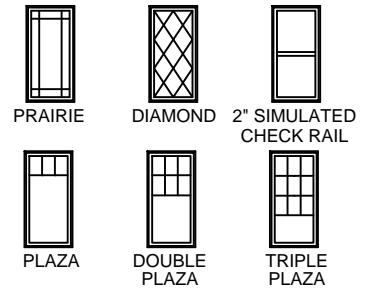

### UNIT SIZE INFORMATION

<b>180 BRICKMOULD</b>
□ ADD 2 13/16" TO FRAME WIDTH
□ ADD 2 7/16" TO FRAME HEIGHT
<b>3 1/2" FLAT CASING</b>
□ ADD 5 13/16" TO FRAME WIDTH
□ ADD 3 15/16" TO FRAME HEIGHT
<b>4 1/2" BACKBAND</b>
□ ADD 7 13/16" TO FRAME WIDTH
□ ADD 4 15/16" TO FRAME HEIGHT
<b>5 1/2" FLAT CASING</b>
□ ADD 9 13/16" TO FRAME WIDTH
□ ADD 5 15/16" TO FRAME HEIGHT
<b>WILLIAMSBURG</b>
□ ADD 5 3/8" TO FRAME WIDTH
□ ADD 3 11/16" TO FRAME HEIGHT
<b>PLANTATION</b>
□ ADD 5 13/16" TO FRAME WIDTH
□ ADD 5 15/16" TO FRAME HEIGHT
* ADD ADDITIONAL 1" FOR BULLNOSE SUBSILL

NOTE:  
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT  
TO CALCULATE MASONRY OPENING

NOTES:  
MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD.

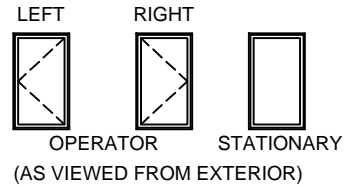
# Legend Series

## CASEMENT - 24" WIDE


ELEVATIONS : OPERATING / PICTURE / STATIONARY  
 SCALE: 1/8" = 1'-0"

Masonry Opening	2-7 9/16	4-11 9/16	7-3 9/16	9-7 9/16
Rough Opq.	2-4 3/4	4-8 3/4	7-0 3/4	9-4 3/4
Frame	2-4	4-8	7-0	9-4
Glass	24	24	24	24
2-2 15/16 2-1 1/4 2-0 20				
2-8 15/16 2-7 1/4 2-6 26				
3-2 15/16 3-1 1/4 3-0 32				
3-8 15/16 3-7 1/4 3-6 38				
4-2 15/16 4-1 1/4 4-0 44				
4-8 15/16 4-7 1/4 4-6 50				
5-2 15/16 5-1 1/4 5-0 56				
5-8 15/16 5-7 1/4 5-6 62				
6-2 15/16 6-1 1/4 6-0 68				
6-8 15/16 6-7 1/4 6-6 74				

### OPERATION



### OTHER GRILLE PATTERNS

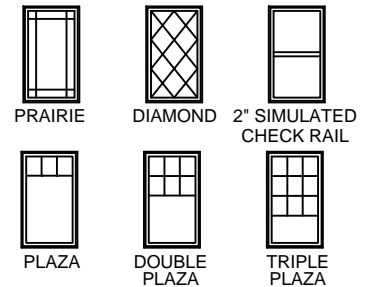

### UNIT SIZE INFORMATION

- 180 BRICKMOULD**  
 □ ADD 2 13/16" TO FRAME WIDTH  
 □ ADD 2 7/16" TO FRAME HEIGHT
- 3 1/2" FLAT CASING**  
 □ ADD 5 13/16" TO FRAME WIDTH  
 □ ADD 3 15/16" TO FRAME HEIGHT
- 4 1/2" BACKBAND**  
 □ ADD 7 13/16" TO FRAME WIDTH  
 □ ADD 4 15/16" TO FRAME HEIGHT
- 5 1/2" FLAT CASING**  
 □ ADD 9 13/16" TO FRAME WIDTH  
 □ ADD 5 15/16" TO FRAME HEIGHT
- WILLIAMSBURG**  
 □ ADD 5 3/8" TO FRAME WIDTH  
 □ ADD 3 11/16" TO FRAME HEIGHT
- PLANTATION**  
 □ ADD 5 13/16" TO FRAME WIDTH  
 □ ADD 5 15/16" TO FRAME HEIGHT

\* ADD ADDITIONAL 1" FOR BULLNOSE SUBSILL

NOTE:  
 ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT  
 TO CALCULATE MASONRY OPENING

NOTES:  
 \*\* REQUIRES EGRESS HARDWARE TO MEET EGRESS REQUIREMENTS.  
 MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD.  
 SHADED SIZES MEET MOST EGRESS REQUIREMENTS. VERIFY LOCAL CODES.


# Legend Series

## CASEMENT - 26" WIDE


ELEVATIONS : OPERATING / PICTURE / STATIONARY  
 SCALE: 1/8" = 1'-0"

Masonry Opening Rough Opg. Frame Glass	2-9 9/16 2-6 3/4 2-6 26	5-3 9/16 5-0 3/4 5-0 26	7-9 9/16 7-6 3/4 7-6 26	10-3 9/16 10-0 3/4 10-0 26
2-2 15/16 2-1 1/4 2-0 20				
2-8 15/16 2-7 1/4 2-6 26				
3-2 15/16 3-1 1/4 3-0 32				
3-8 15/16 3-7 1/4 3-6 38				
4-2 15/16 4-1 1/4 4-0 44				
4-8 15/16 4-7 1/4 4-6 50				
5-2 15/16 5-1 1/4 5-0 56				
5-8 15/16 5-7 1/4 5-6 62				
6-2 15/16 6-1 1/4 6-0 68				
6-8 15/16 6-7 1/4 6-6 74				

### OPERATION



### OTHER GRILLE PATTERNS

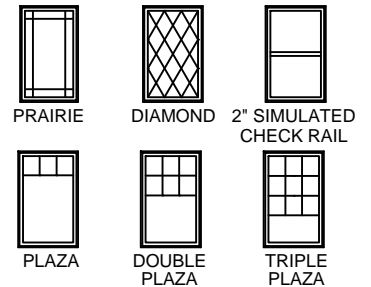

### UNIT SIZE INFORMATION

- 180 BRICKMOULD**
    - ▣ ADD 2 13/16" TO FRAME WIDTH
    - ▣ ADD 2 7/16" TO FRAME HEIGHT
  - 3 1/2" FLAT CASING**
    - ▣ ADD 5 13/16" TO FRAME WIDTH
    - ▣ ADD 3 15/16" TO FRAME HEIGHT
  - 4 1/2" BACKBAND**
    - ▣ ADD 7 13/16" TO FRAME WIDTH
    - ▣ ADD 4 15/16" TO FRAME HEIGHT
  - 5 1/2" FLAT CASING**
    - ▣ ADD 9 13/16" TO FRAME WIDTH
    - ▣ ADD 5 15/16" TO FRAME HEIGHT
  - WILLIAMSBURG**
    - ▣ ADD 5 3/8" TO FRAME WIDTH
    - ▣ ADD 3 11/16" TO FRAME HEIGHT
  - PLANTATION**
    - ▣ ADD 5 13/16" TO FRAME WIDTH
    - ▣ ADD 5 15/16" TO FRAME HEIGHT
- \* ADD ADDITIONAL 1" FOR BULLNOSE SUBSILL

NOTE:  
 ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT  
 TO CALCULATE MASONRY OPENING

NOTES:  
 \*\* REQUIRES EGRESS HARDWARE TO MEET EGRESS REQUIREMENTS.  
 MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD.  
 SHADED SIZES MEET MOST EGRESS REQUIREMENTS. VERIFY LOCAL CODES.

2674 UNITS AVAILABLE  
 AS FIXED UNITS ONLY


# Legend Series

## CASEMENT - 28" WIDE


ELEVATIONS : OPERATING / PICTURE / STATIONARY  
 SCALE: 1/8" = 1'-0"

Masonry Opening Rough Opng. Frame Glass	2-11 9/16	5-7 9/16	8-3 9/16	10-11 9/16
	2-8 3/4	5-4 3/4	8-0 3/4	10-8 3/4
	2-8	5-4	8-0	10-8
	28	28	28	28
2-2 15/16 2-1 1/4 2-0 20				
2-8 15/16 2-7 1/4 2-6 26				
3-2 15/16 3-1 1/4 3-0 32				
3-8 15/16 3-7 1/4 3-6 38				
4-2 15/16 4-1 1/4 4-0 44				
4-8 15/16 4-7 1/4 4-6 50				
5-2 15/16 5-1 1/4 5-0 56				
5-8 15/16 5-7 1/4 5-6 62				
6-2 15/16 6-1 1/4 6-0 68				
6-8 15/16 6-7 1/4 6-6 74				

### OPERATION



### OTHER GRILLE PATTERNS

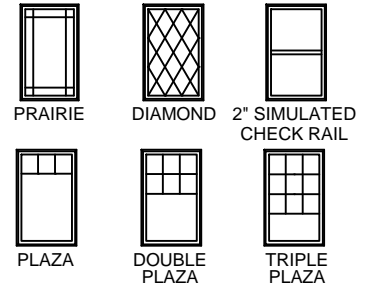

### UNIT SIZE INFORMATION

- 180 BRICKMOULD**  
 □ ADD 2 13/16" TO FRAME WIDTH  
 □ ADD 2 7/16" TO FRAME HEIGHT
- 3 1/2" FLAT CASING**  
 □ ADD 5 13/16" TO FRAME WIDTH  
 □ ADD 3 15/16" TO FRAME HEIGHT
- 4 1/2" BACKBAND**  
 □ ADD 7 13/16" TO FRAME WIDTH  
 □ ADD 4 15/16" TO FRAME HEIGHT
- 5 1/2" FLAT CASING**  
 □ ADD 9 13/16" TO FRAME WIDTH  
 □ ADD 5 15/16" TO FRAME HEIGHT
- WILLIAMSBURG**  
 □ ADD 5 3/8" TO FRAME WIDTH  
 □ ADD 3 11/16" TO FRAME HEIGHT
- PLANTATION**  
 □ ADD 5 13/16" TO FRAME WIDTH  
 □ ADD 5 15/16" TO FRAME HEIGHT
- \* ADD ADDITIONAL 1" FOR BULLNOSE SUBSILL

NOTE:  
 ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT  
 TO CALCULATE MASONRY OPENING

NOTES:  
 \*\* REQUIRES EGRESS HARDWARE TO MEET EGRESS REQUIREMENTS.  
 MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD.  
 SHADED SIZES MEET MOST EGRESS REQUIREMENTS. VERIFY LOCAL CODES.

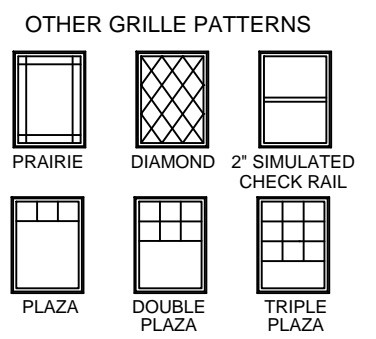
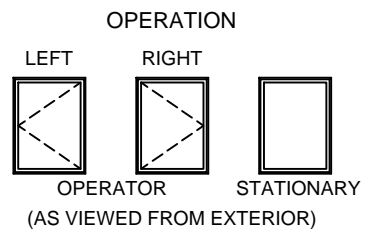
2674 UNITS AVAILABLE  
 AS FIXED UNITS ONLY

# Legend Series

## CASEMENT - 32" WIDE

ELEVATIONS : OPERATING / PICTURE / STATIONARY  
 SCALE: 1/8" = 1'-0"

Masonry Opening Rough Opg. Frame Glass	3-3 9/16 3-0 3/4 3-0 32	6-3 9/16 6-0 3/4 6-0 32	9-3 9/16 9-0 3/4 9-0 32	12-3 9/16 12-0 3/4 12-0 32
2-2 15/16 2-1 1/4 2-0 20	3220	3220-2	3220-3	3220-4
2-8 15/16 2-7 1/4 2-6 26	3226	3226-2	3226-3	3226-4
3-2 15/16 3-1 1/4 3-0 32	3232	3232-2	3232-3	3232-4
3-8 15/16 3-7 1/4 3-6 38	3238	3238-2	3238-3	3238-4
4-2 15/16 4-1 1/4 4-0 44	3244	3244-2	3244-3	3244-4
4-8 15/16 4-7 1/4 4-6 50	3250	3250-2	3250-3	3250-4
5-2 15/16 5-1 1/4 5-0 56	3256	3256-2	3256-3	3256-4
5-8 15/16 5-7 1/4 5-6 62	3262	3262-2	3262-3	3262-4
6-2 15/16 6-1 1/4 6-0 68	3268	3268-2	3268-3	3268-4
6-8 21/32 6-7 1/4 6-6 74	3274	3274-2	3274-3	3274-4



- UNIT SIZE INFORMATION**
- 180 BRICKMOULD**
- ADD 2 13/16" TO FRAME WIDTH
  - ADD 2 7/16" TO FRAME HEIGHT
- 3 1/2" FLAT CASING**
- ADD 5 13/16" TO FRAME WIDTH
  - ADD 3 15/16" TO FRAME HEIGHT
- 4 1/2" BACKBAND**
- ADD 7 13/16" TO FRAME WIDTH
  - ADD 4 15/16" TO FRAME HEIGHT
- 5 1/2" FLAT CASING**
- ADD 9 13/16" TO FRAME WIDTH
  - ADD 5 15/16" TO FRAME HEIGHT
- WILLIAMSBURG**
- ADD 5 3/8" TO FRAME WIDTH
  - ADD 3 11/16" TO FRAME HEIGHT
- PLANTATION**
- ADD 5 13/16" TO FRAME WIDTH
  - ADD 5 15/16" TO FRAME HEIGHT
- \* ADD ADDITIONAL 1" FOR BULLNOSE SUBSILL

**NOTE:**  
 ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT  
 TO CALCULATE MASONRY OPENING

**NOTES:**  
 MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD.  
 SHADED SIZES MEET MOST EGRESS REQUIREMENTS, VERIFY LOCAL CODES.









































2674 UNITS AVAILABLE  
 AS FIXED UNITS ONLY

# Legend Series


## CASEMENT - PICTURE

### ELEVATIONS

SCALE: 1/8" = 1'-0"

Masonry Opening Rough Opng. Frame Glass	3-9/16	4-3 9/16	4-9 9/16	5-3 9/16	6-3 9/16
	3-6 3/4	4-0 3/4	4-6 3/4	5-0 3/4	6-0 3/4
	3-6	4-0	4-6	5-0	6-0
	38	44	50	56	68
3-2 15/16 3-1 1/4 3-0 32	 3832	 4432	 5032	 5632	 6832
3-8 15/16 3-7 1/4 3-6 38	 3838	 4438	 5038	 5638	 6838
4-2 15/16 4-1 1/4 4-0 44	 3844	 4444	 5044	 5644	 6844
4-8 15/16 4-7 1/4 4-6 50	 3850	 4450	 5050	 5650	 6850
5-2 15/16 5-1 1/4 5-0 56	 3856	 4456	 5056	 5656	 6856
5-8 15/16 5-7 1/4 5-6 62	 3862	 4462	 5062	 5662	 6862
6-2 15/16 6-1 1/4 6-0 68	 3868	 4468	 5068	 5668	 6868
6-8 15/16 6-7 1/4 6-6 74	 3874	 4474	 5074	 5674	 6874

### OTHER GRILLE PATTERNS

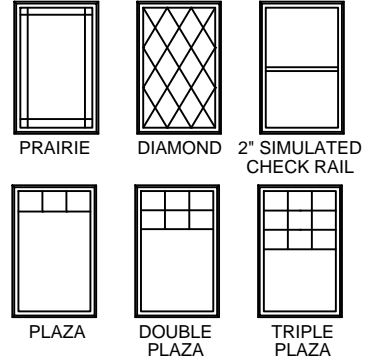

### UNIT SIZE INFORMATION

- 180 BRICKMOULD**
    - ADD 2 13/16" TO FRAME WIDTH
    - ADD 2 7/16" TO FRAME HEIGHT
  - 3 1/2" FLAT CASING**
    - ADD 5 13/16" TO FRAME WIDTH
    - ADD 3 15/16" TO FRAME HEIGHT
  - 4 1/2" BACKBAND**
    - ADD 7 13/16" TO FRAME WIDTH
    - ADD 4 15/16" TO FRAME HEIGHT
  - 5 1/2" FLAT CASING**
    - ADD 9 13/16" TO FRAME WIDTH
    - ADD 5 15/16" TO FRAME HEIGHT
  - WILLIAMSBURG**
    - ADD 5 3/8" TO FRAME WIDTH
    - ADD 3 11/16" TO FRAME HEIGHT
  - PLANTATION**
    - ADD 5 13/16" TO FRAME WIDTH
    - ADD 5 15/16" TO FRAME HEIGHT
- \* ADD ADDITIONAL 1" FOR BULLNOSE SUBSILL

NOTE:  
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT  
TO CALCULATE MASONRY OPENING

NOTES:  
MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD.



# Legend Series

## CASEMENT - TRANSOM

### ELEVATIONS

SCALE: 1/8" = 1'-0"

Masonry Opening	1-9 9/16	1-11 9/16	2-3 9/16	2-7 9/16	2-9 9/16	3-5 9/16	3-3 9/16
Rough Oppg.	1-6 3/4	1-8 3/4	2-0 3/4	2-4 3/4	2-6 3/4	3-2 3/4	3-0 3/4
Frame	1-6	1-8	2-0	2-4	2-6	3-2	3-0
Glass	14	16	20	24	26	28	32
1-2 15/16	1408	1608	2008	2408	2608	2808	3208
1-0 1/2							
1-0	8						
1-4 15/16	1410	1610	2010	2410	2610	2810	3210
1-2 1/2							
1-2	10						
1-6 15/16	1412	1612	2012	2412	2612	2812	3212
1-4 1/2							
1-4	12						
1-8 15/16	1414	1614	2014	2414	2614	2814	3214
1-6 1/2							
1-6	14						
1-10 15/16	1416	1616	2016	2416	2616	2816	3216
1-8 1/2							
1-8	16						
2-2 15/16			2020	2420	2620	2820	3220
2-0 1/2							
2-0			20				
2-6 15/16				2424	2624	2824	3224
2-4 1/2							
2-4				24			
2-8 15/16					2626	2826	3226
2-6 1/2							
2-6					26		

### OTHER GRILLE PATTERNS



PRAIRIE



PLAZA



DIAMOND

### UNIT SIZE INFORMATION

#### 180 BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 2 7/16" TO FRAME HEIGHT

#### 3 1/2" FLAT CASING

- ADD 5 13/16" TO FRAME WIDTH
- ADD 3 15/16" TO FRAME HEIGHT

#### 4 1/2" BACKBAND

- ADD 7 13/16" TO FRAME WIDTH
- ADD 4 15/16" TO FRAME HEIGHT

#### 5 1/2" FLAT CASING

- ADD 9 13/16" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT

#### WILLIAMSBURG

- ADD 5 3/8" TO FRAME WIDTH
- ADD 3 11/16" TO FRAME HEIGHT

#### PLANTATION

- ADD 5 13/16" TO FRAME WIDTH
- ADD 5 15/16" TO FRAME HEIGHT

\* ADD ADDITIONAL 1" FOR BULLNOSE SUBSILL

### NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT  
TO CALCULATE MASONRY OPENING

### NOTES:









































MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD

# Legend Series

## CASEMENT - TRANSOM

### ELEVATIONS

SCALE: 1/8" = 1'-0"

Masonry Opening	3-9 9/16	4-3 9/16	4-9 9/16	5-3 9/16	6-3 9/16
Rough Opp.	3-6 3/4	4-0 3/4	4-6 3/4	5-0 3/4	6-0 3/4
Frame	3-6	4-0	4-6	5-0	6-0
Glass	38	44	50	56	68
1-2 15/16					
1-0 1/2					
1-0	8				
1-4 15/16					
1-2 1/2					
1-2	10				
1-6 15/16					
1-4 1/2					
1-4	12				
1-8 15/16					
1-6 1/2					
1-6	14				
1-10 15/16					
1-8 1/2					
1-8	16				
2-2 15/16					
2-0 1/2					
2-0	20				
2-6 15/16					
2-4 1/2					
2-4	24				
2-8 15/16					
2-6 1/2					
2-6	26				

### OTHER GRILLE PATTERNS



PRAIRIE



PLAZA



DIAMOND

### UNIT SIZE INFORMATION

#### 180 BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 2 7/16" TO FRAME HEIGHT

#### 3 1/2" FLAT CASING

- ▣ ADD 5 13/16" TO FRAME WIDTH
- ▣ ADD 3 15/16" TO FRAME HEIGHT

#### 4 1/2" BACKBAND

- ▣ ADD 7 13/16" TO FRAME WIDTH
- ▣ ADD 4 15/16" TO FRAME HEIGHT

#### 5 1/2" FLAT CASING

- ▣ ADD 9 13/16" TO FRAME WIDTH
- ▣ ADD 5 15/16" TO FRAME HEIGHT

#### WILLIAMSBURG

- ▣ ADD 5 3/8" TO FRAME WIDTH
- ▣ ADD 3 11/16" TO FRAME HEIGHT

#### PLANTATION

- ▣ ADD 5 13/16" TO FRAME WIDTH
- ▣ ADD 5 15/16" TO FRAME HEIGHT

\* ADD ADDITIONAL 1" FOR BULLNOSE SUBSILL

### NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT  
TO CALCULATE MASONRY OPENING

### NOTES:

MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD