




NEXT DIMENSION PRO SERIES

HORIZONTAL MULL REINFORCEMENT GUIDELINES


MULLION

NOTE: SIZES SHOWN ARE FOR INDIVIDUAL UNIT SIZES WITHIN THE MULLED CONFIGURATION

		WINDOW WIDTH [IN]									
		18	24	30	36	42	48	54	60	66	72
WINDOW HEIGHT [IN]	18	50	50	50	50	50	50	50	45	35	30
	24	50	50	50	50	50	50	50	45	35	30
	30	50	50	50	50	50	50	45	35	30	25
	36	50	50	50	50	50	50	35	30	25	20
	42	50	50	50	50	50	40	30	25	20	
	48	50	50	50	50	45	35	30	20	20	
	54	50	50	50	50	40	30	25	20		
	60	50	50	50	50	40	30	20			
	66	50	50	50	50	35	25	20			
	72	50	50	50	45	30	25	20			
78	50	50	50	40	30	20					

	No Reinforcement
	Reinforcement Required
	Exceeds Mulling Limitations

Numbers shown are calculated **STRUCTURAL DP Rating** for the **mull ONLY**.
 Refer to individual unit ratings for structural, air and water performance of the individual unit(s).
 For composite structural rating use the **LOWER** of the mull and unit(s) individual structural ratings.

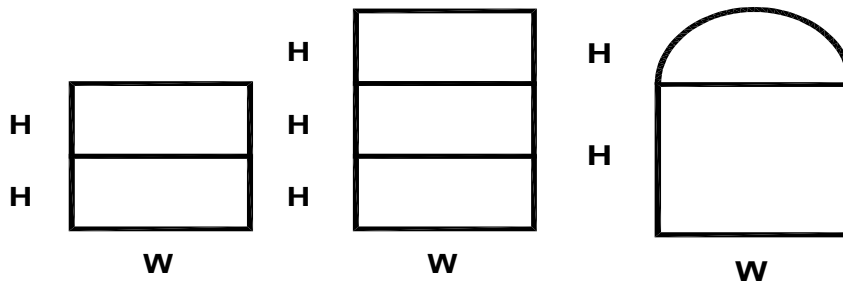

- Notes:
- 1) Use Largest Height (H)
 - 2) Maximum Deflection: $\text{Span} / 30$
 - 3) Rebar Specs: 1/4" x 1 7/8" Steel Bar
 - 4) Overall Mulling Configuration not to Exceed: 72" x 96"