




NEXT DIMENSION PRO SERIES

3-WAY MULL REINFORCEMENT GUIDELINES


MULLION

NOTE: SIZES SHOWN PER DIAGRAM BELOW

		TOTAL UNIT WIDTH [IN]												
		18	24	30	36	42	48	54	60	66	72	78	84	90
WINDOW HEIGHT [IN]	18	50	50	50	50	50	50	50	45	35	30	25	20	20
	24	50	50	50	50	50	50	50	45	35	30	25	20	20
	30	50	50	50	50	50	50	45	35	30	25	20		
	36	50	50	50	50	50	50	40	30	25	20			
	42	50	50	50	50	50	45	35	25	20				
	48	50	50	50	50	50	40	30	25	20				
	54	50	50	50	50	50	40	30	20					
	60	50	50	50	50	50	35	25	20					
	66	50	50	50	50	45	35	25	20					
	72	50	50	50	50	45	30	25	20					
78	50	50	50	50	40	30	20							

-  No Reinforcement
-  Reinforcement Required
-  Exceeds Mulling Limitations

Numbers shown are calculated **STRUCTURAL DP Rating** for the mull ONLY.
 Refer to individual unit ratings for structural, air and water performance of the individual unit(s).
 For composite structural rating use the **LOWER** of the mull and unit(s) individual structural ratings.

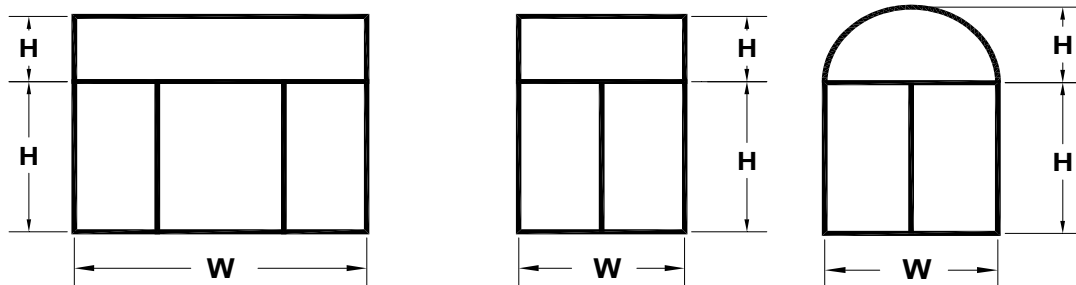

RULES FOR REINFORCEMENT LOCATION

In unit configurations with both vertical and horizontal T-Bars, place the reinforcement in the T-Bar which spans the entire unit.

- Notes:
- 1) Use Largest Height (H)
 - 2) Maximum Deflection: Span / 30
 - 3) Rebar Specs: 1/4" x 1 7/8" Steel Bar
 - 4) Overall Mulling Configuration not to Exceed: 90" x 84"